Life's Good

L2300B

FLATRON 23" ACTIVE MATRIX WIDESCREEN LCD 16:9 COLOR MONITOR

23" LCD
L2300B

23" Monitor
Truly Flat LCD screen delivers razor sharp images

1920 x 1200p Resolution
High resolution format produces extremely detailed imagery

400:1 High Contrast Ratio
LCD technology emits sharp contrast between light and dark images

250 cd/m² High Brightness
Renders an incredibly bright picture, even in light-drenched environments

176 Degrees Viewing Angle
New Super IPS Technology allows for distortion-free viewing from almost any angle

Digital (DVI-D) and Standard Analog VGA Inputs

Auto-Synchronous Support from 640 x 350p up to 1920 x 1200p @ 60 Hz

Simple One Button Auto Setup

Univeral 90-264 VAC Power

Flexible Stand
Stand can swivel to a 45° angle, extend to 3¼" taller, and pivot the monitor to portrait mode

energy

L2300B Flatron 23" Active Matrix Widescreen LCD 16:9 Color Monitor

DIMENSIONS

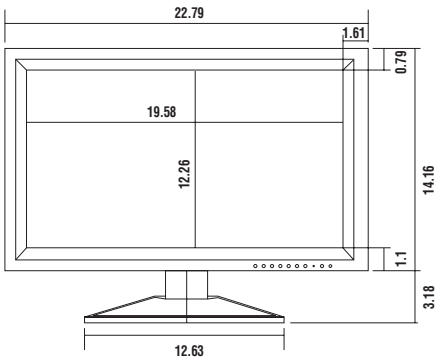

Front View

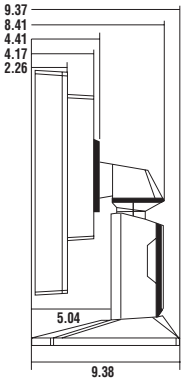

Side View

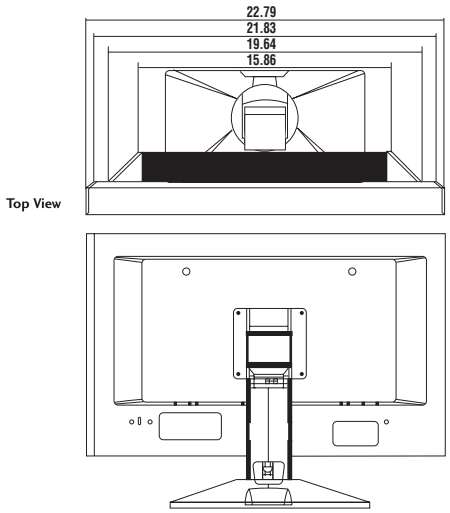

Back View

PANEL

Display Type	23.0" Flat Panel Active Matrix TFT LCD Screen
Display Area (H x V)	16:9 (495.36 x 309.6 mm)
Display Colors	16.8 Million (6 Bits + FRC)
Pixel Pitch	0.26 mm x 0.26 mm Pixels
Surface Treatment	Hard Coating 3H, Anti-Glare
Electronic Interface	TMDS
Backlighting	12 CCFL
Maximum Resolution	1920 x 1200p
Brightness	250 cd/m² (Typical)
Contrast Ratio	400:1 (Typical)
Response Time	16ms (Typical)
Viewing Angle (H x V)	176° x 176°
Horizontal Scanning Frequencies	D-Sub (30 ~ 96 kHz), DVI-D (30 ~ 93 kHz)
Vertical Scanning Frequencies	56–85 kHz, Auto-Synchronous
Auto-Sync Support	640 x 350 up to 70 Hz, 640 x 480 up to 85 Hz, 720 x 400 up to 70 Hz, 800 x 600 up to 85 Hz, 832 x 624 up to 75 Hz, 1024 x 768 up to 85 Hz, 1152 x 870 up to 75 Hz, 1152 x 900 up to 65 Hz 1280x 1024 up to 75 Hz, 1600 x 1200 up to 75 Hz, 1920 x 1200 up to 60 Hz
Control Type	On-Screen Display of Adjustments
Sync Signaling	Separate, Composite, SOG, Digital Signal
Plug and Play Level	DDC2B
MTBF	50,000
Monitor Position	H/V Position

DIGITAL ON-SCREEN CONTROLS

Brightness	Yes
Contrast	Yes
Horizontal/Vertical Position	Yes
Clock	Yes
Phase	Yes
OSD Lock	Yes
Color Temp (9300K, 6500K, User)	Yes
Language	Yes
Image Size	Yes
OSD Position	Yes
Auto Adjust	Yes
Menu	Yes
Auto/Select	Yes

REAR INPUTS

Input Signal	RBG Analog/Digital
Input Terminals	15-Pin D-Sub, DVI-D, RS-232 In/Out

ACCESSORIES

Power Cord	Yes
Signal Cable	Yes
DVI Cable	Yes
Manual	Yes
Install Disk	Yes

CABINET

Front Panel Controls	Source, Menu (Down/Up, Left/Right), Auto/Select, Power
VESA™ Standard Mount Interface	Yes (100 mm)
Dimensions with Base (W x H x D)	22.79" x 17.34" x 9.38"
Neck of stand expands height to:	20.6"
Weight	25.02 Lbs.
Carton Dimensions (W x H x D)	26.25" x 13.25" x 21"
Weight	32.52 Lbs.
Detachable Stand	Yes

POWER

Power Requirements	90~264V (47/63 Hz)
DPMS Power Consumption	On: 60W Standby: 5W DPMS Off: 3W

SERVICE/LIMITED WARRANTY

LGEUS Warranty	3 Year QuickSwap Replacement Program
EPA Energy Star	Yes

SAFETY/REGULATORY

TCO '99	Yes
UL	Yes
FCC-B	Yes
CE	Yes
EPA Energy Star	Yes
SEMCO	Yes
GOST	Yes
TUV-GS	Yes
VCCI-2	Yes
C-TICK	Yes

REAR JACK PANEL



AC Input | RS-232C (Upgrade Port) | DVI-D Input | D-Sub

www.LGcommercial.com

LG Electronics U.S.A., Inc. 2000 Millbrook Drive, Lincolnshire, IL 60069 Customer Service: 1-888-865-3026

Dimensions and weights are approximate. Design and specifications subject to change without notice. VESA™ is a registered trademark of Video Electronics Association. The "LG Life's Good" is a registered trademark of LG Electronics U.S.A., Inc.

©2005 LG Electronics U.S.A., Inc. Printed in the USA. LGL2300B0105

LG Life's Good